
GENERAL NOTES:

- 1. PROVIDE STRAIGHT VERTICAL SAW CUTS TO A NEAT LINE AS DIRECTED BY FIELD ENGINEER.
- 2. CONCRETE SURFACES TO BE CLEANED AND BITUMINOUS TACK OR PRIME COAT APPLIED BEFORE PLACEMENT OF ASPHALTIC TOPPING.
- 3. CONTRACTOR TO UTILIZE STEEL RUNNING PLATES OR OTHER APPROVED METHODS DURING CURING OF CONCRETE. PLATES TO BE REMOVED UPON SATISFACTION OF FIELD ENGINEER.
- 4. WHEN INSTALLING PIPELINE AT EDGE OF ROAD LANE-WITHIN 3-FEET OF EDGE OF PAVEMENT, THIS PAVEMENT CUT AND REPLACEMENT MUST EXTEND AND INCLUDE THE ENTIRE WAY TO THE EDGE OF THE PAVEMENT.
- 5. SEE SPECIFICATION SECTIONS 02225 AND 02523 FOR ADDITIONAL INFORMATION AND PROCEDURES FOR PAVEMENT CUT AND REPAIR.
- 6. CONSTRUCTION METHODS AND MATERIALS SHALL BE IN ACCORDANCE WITH G.D.O.T. STANDARD SPECIFICATIONS FOR CONSTRUCTION OF ROADS AND BRIDGES, LATEST EDITION.

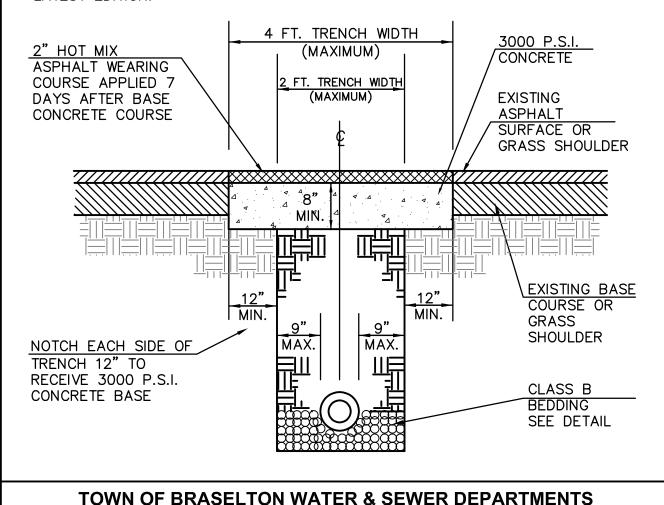

FILE No. 03033\S-31.dwg

SCALE N.T.S.

DETAIL No.

S-31